

## The logo of the International Civil Aviation Organization (ICAO) is a circular emblem. It features a globe with latitude and longitude lines, centered on the North Pole. The globe is flanked by two olive branches. Above the globe, the acronym "ICAO" is written in a large, stylized font, with "OACI" and "ИКАО" written in smaller fonts to its right. Below the globe, the Chinese characters "国际民航组织" are written in a stylized font, with "9" and "15" written in smaller fonts to its right.

- RAL7035 coating



## XLFE-MIB/1 Medium intensity LED Obstruction lighting fixtures

XLFE-MIB/1 series Medium intensity LED Obstruction lighting fixtures can be installed in hazardous areas of industrial plants classified as Zone 1, Zone 2, Zone 21, Zone 22.

The light source was developed by Cortem Group upon the experience of the past in the world of LED lighting. In fact, the use of a new LED generation and of the reflector internally designed has allowed the reduction of external dimensions to Ø176x205mm. The red XLFE-MIB/1 series lighting fixture, with an intensity of more than 2000 candles and flashing operation, complies for light distribution with the requirements of the ICAO Annex 14 for aviation obstruction warning lights of medium-intensity B type.

The XLFE-MIB/1 series has been designed for Zone 1 with an 'Ex db' optical source. The particular design avoids any type of optical error typical of the glass globes.

As required by the ICAO regulations, the XLFE-MIB/1 series has a flashing operation, standard at 20 fpm, upon request at 40 fpm.

The installation is facilitated by the reduced dimensions, the wiring is done with cable gland in a 'Ex e' enclosure, avoiding the use of sealed cable glands or the resin finishing at high heights.

The signalling device is not a stand-alone device but it is part of a system that provides power from a panel. This choice reduces maintenance operations by making the power supplies accessible from the management panel.


### Application sectors:



### CERTIFICATION DATA

Classification:	Group II	Category 2GD		
Installation:: EN 60079.14	zone 1 - zone 2 (Gas)	zone 21 - zone 22 (Dust)		
Marking:	CE 0722 Ex II 2GD Ex db eb IIC T4 Gb; Ex tb IIIC T1 10°C Db IP66			
Certification:	ATEX CML 19 ATEX 1333X			
	IECEX IECEX CML 19.0102X			
Standards:	CENELEC EN 60079-0: 2012+A11: 2013, EN 60079-1: 2014, EN 60079-31: 2014, EN 60079-28: 2015, EN 60079-7: 2015 and EUROPEAN DIRECTIVE 2014/34/UE IEC 60079-0: 2011, IEC 60079-1: 2014-06, IEC 60079-28: 2015, IEC 60079-31: 2013, IEC 60079-7: 2015 European Directive 2004/108 Electromagnetic compatibility European Directive 2012/19/UE, 2002/96/CE, 2003/108/CE WEEE European Directive 2011/65/UE RoHS			
Class temperature:	110°C (T4)	130°C (T4)		
Ambient temperature:	XLFE-MIB/1 -40°C +60°C			
Degree of protection:	IP66			

## XLFE-MIB/1 Medium intensity LED Obstruction lighting fixtures

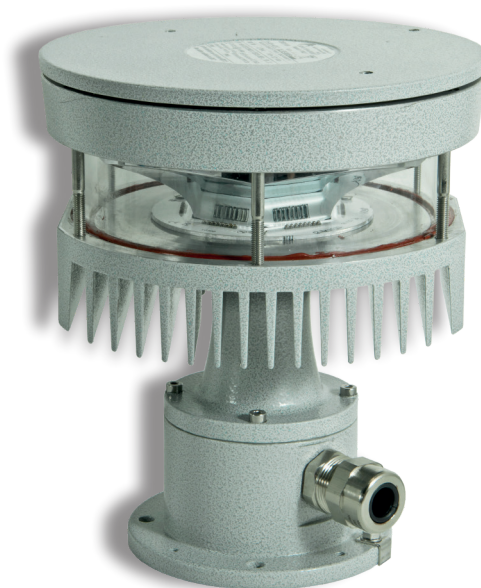

ORIGINAL PRODUCT

### MECHANICAL FEATURES

<b>Body:</b>	Low copper content aluminium alloy fitted with cooling fins for better heat dissipation
<b>Glass face:</b>	Shock and temperature resistant borosilicate glass sealed with aluminium shade ring
<b>Internal reflector:</b>	Chrome-plated aluminum
<b>Gaskets:</b>	Silicone acid/hydrocarbon and higt temperatures resistant
<b>Mounting:</b>	See "XLFE-MIB/1 series dimensional drawings"
<b>Bolts and screws:</b>	Stainless steel
<b>Entries:</b>	1 ISO M20 entry complete with NAV20SIB
<b>Coating:</b>	Polyester coating Ral 7035 (light grey)
<b>Corrosion Resistance:</b>	The STANDARD of the aluminium alloy used by Cortem has passed the tests required by standards EN60068-2-30 (hot/humid cycles) and EN60068-2-11 (salt mist tests)

### ACCESSORIES AVAILABLE / SPECIAL REQUESTS

Ex or watertight protected control panel

Cable gland: NAV25IB for non-armoured cable or NEV25IB for armoured cable


Birds deterrent (**G-1010**)

### COMPLIANCE

**ICAO Regulations, FAA.** The red XLFE-MIB/1 series lighting fixtures with luminous intensity of more than 2000 candles complies for light distribution with the ICAO Annex 14 Aerodromes vol. I. June 2016 (corresponding to the FAA model, L-864 code). In accordance with the provisions of this standard, the luminous flux of the lighting fixture on the horizontal plane is 360° while on the vertical plane it is 3°.




**Patent Pending**

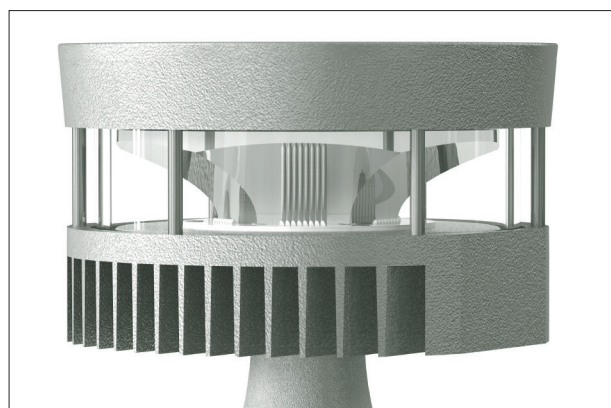




## XLFE-MIB/1 Medium intensity LED Obstruction lighting fixtures


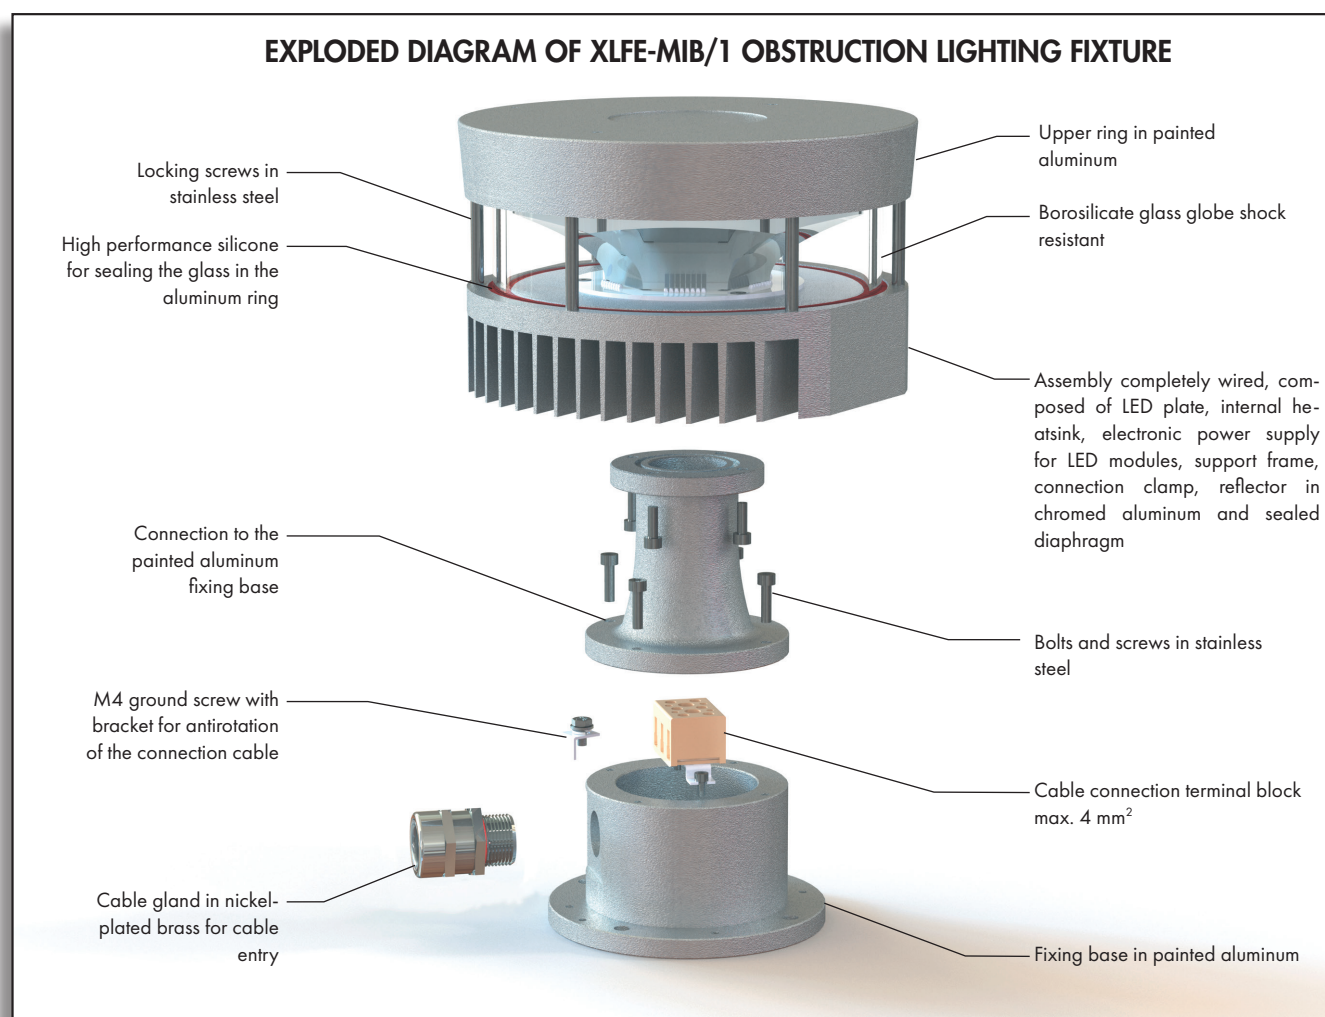


Features	XLFE-MIB/1
Type of product:	Obstruction lighting fixture Medium intensity Type B
Light source:	LED
Color:	Red
Typical use:	Night
Power consumption:	30 W
Connection:	Direct connection to terminal board L, N, Pe. Section 4mm <sup>2</sup>
Flashing rate:	20 - 40 fpm (flash per minute)
Vertical beam spread:	3°
Minimum light intensity (360°):	2000 cd
Horizontal coverage:	360°




## XLFE-MIB/1 Medium intensity LED Obstruction lighting fixtures

Code	Colour light	Type of light	Type of circuit	Power consumption	Ambient Temperature	Weight kg	 mm
XLFE-MIB/1	Red	Flash	Single	30 W	-40°C +60°C	5	260x250x300



### DIMENSIONAL DRAWING

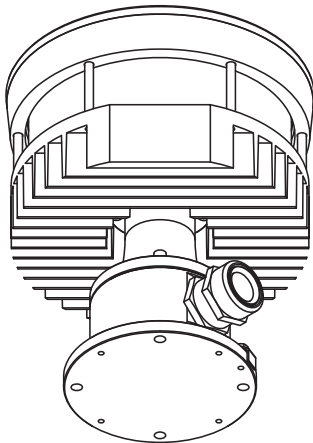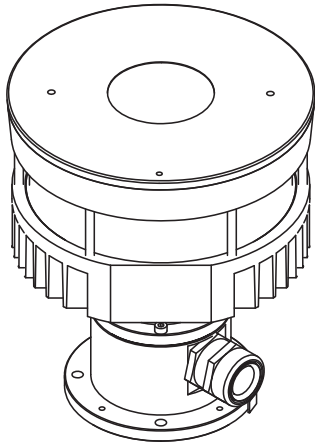

Close up of mounting

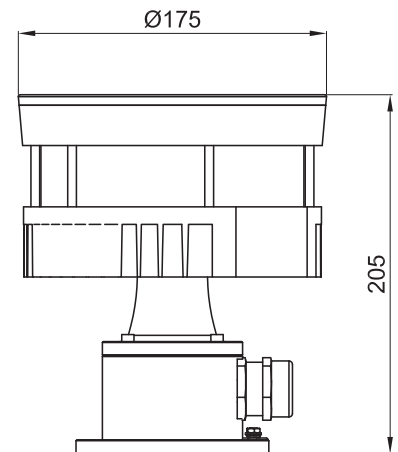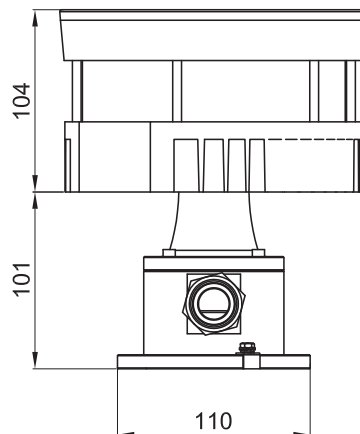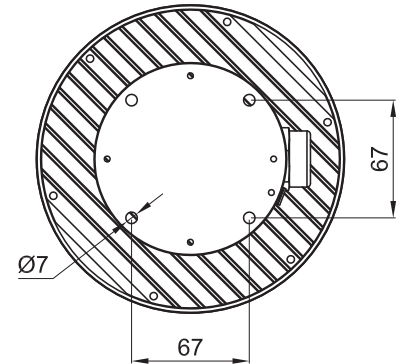

Dimensions in mm

ILLUSTRATION	DESCRIPTION	FEATURES	CODE	KEY
	Bird dissuader	Material: Stainless steel AISI 316L	G-1010	

# XLFE-MIB/1 Medium intensity LED Obstruction lighting fixtures

